

STYLISH DESIGN

5 TYPES OF SANDWICH PANELS

10 STANDARD COLOURS


3 WOOD-FINISHED COLOURS

210 RAL COLOURS

14 COLOURS

∞ CUSTOM DESIGNS

+ ADDITIONAL ACCESSORIES

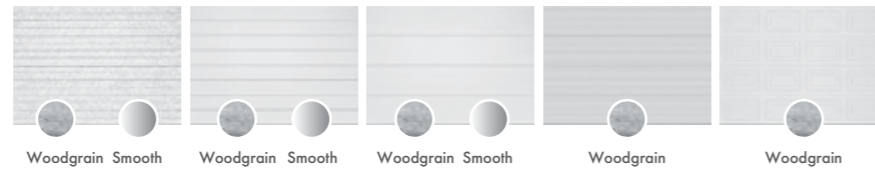

	S-ribbed	M-ribbed	L-ribbed	Microwave	Cassette
RAL 9016	●	●	●	●	●
RAL 9006	●			●	
RAL 1015	●			●	
RAL 8014	●	●	●	●	●
RAL 8017	●			●	
RAL 5010	●			●	
RAL 3004	●			●	
RAL 6005	●			●	
RAL 7016	●	●	●	●	
ADS 703	●		●	●	
ADS 704	Exclusively for Prestige series		●	●	
Golden oak	●	●	●		●
Dark oak	●	●	●		●
Cherry	●	●	●		●
RAL catalogue	●	●	●	●	●
Deutsche Bahn catalogue	●	●	●	●	●

Application of custom-made patterns of any complexity by digital printing with additional varnish coating. Exclusively for Prestige series.

Wide variety of additional accessories for garage doors: inbuilt wicket, windows, air grids, key lock.



COMFORTABLE CONTROL

ALUTECH Group of Companies approach the issue of comfort comprehensively and offer a wide range of solutions for your convenience and safety.

Entrance gates — sliding and hinged gates, side doors, fence sections.

Roller shutters systems for window and door openings.

Aluminium profile systems for window and door openings.



www.alutech-group.com



03.2021, Art. R7020299E

SECTIONAL GARAGE DOORS

SIGN OF COMFORT AND SAFETY

Exclusive offer

PRESTIGE SERIES GARAGE DOORS



Unique design



Exclusive style




Excellent thermal insulation




Sandwich panel of 45 mm thickness

Doors Prestige series have high energy efficiency comparable to thermal insulation of 60 cm brick wall. This allows to reduce heating costs during winter time.



Stainless fittings

Intermediate hinges and roller brackets are made of stainless steel AISI430 which ensures reliable door operation even in damp premises.




Advanced sealing

Two-wing EPDM sealing remains flexible even at low temperatures. Air chamber between the wings serves for additional thermal insulation.



Silent operation

Special double rollers used in Prestige doors ensure smooth and silent door leaf movement (option).



Individual style

Digital printing allows to put onto the door leaf any image you want as well as to create wood, metal or stone designs.

ADVANCED SANDWICH PANEL STRUCTURE

Finger-trapping protection according to EU safety standards.

Closed-contour panel design prevents delamination in case of abrupt doors closing or their overheating under the sun.

Four layers of metal in place of inner and outer steel sheets connection ensure panel durability and reliability.

Multilayer polyurethane panel coating guarantees excellent corrosion resistance.

Adhesion varnish ensures durable junction of steel sheets to the polyurethane protecting panels against bubbling under the sun heat.



Efficient solution

TREND SERIES GARAGE DOORS



Affordable price



High quality product



Sandwich panel of 40 mm thickness

Doors Trend series efficiently save heat ensuring temperature balance in the premises.



Galvanized fittings

Roller brackets and intermediate hinges made of galvanized steel are an ideal solution for the premises with normal humidity.



Reliable sealing

Flexible frost-resistant EPDM sealing ensures high thermal and sound insulation of the doors.



Additional protection for angle profiles

During heavy precipitation water can accumulate near the doors. Polimeric base of the angle profiles eliminates the risk of corrosion in high humidity conditions.



Harmonious look

Painted angle bars and header profile match the door leaf perfectly. Door frame is painted in white (close to RAL 9016) as standard.



LONG OPERATION LIFE

Spring life time is 25 000 of opening/closing cycles. If the doors are operated four times a day, they will work for more than 17 years.

10 YEARS WARRANTY AGAINST PERFORATED CORROSION*

It is ensured due to a three-layer coating:

- zink layer (16 microns);
- polyurethane primer (14-16 microns);
- 20-25 microns two-layer decorative coating (PUR-PA).

DRAUGHT PROTECTION

Adjustable roller brackets ensure close door leaf adjoining to the sealing. Such solution helps to eliminate draughts and to save heat in the premises.

WIDE POSSIBILITIES FOR STANDARD PRICE

The doors are manufactured individually for every Customer with a 5 mm increment in width and height.

SMOOTH AND SILENT DOOR OPERATION

It is ensured due to the rollers with bearings. Closed-type rolling bearings are protected from dust and moisture and do not require lubrication change.

CERTIFIED SAFETY

In compliance with European safety standards, ALUTECH doors provide protection against:

- finger trapping;
- catching and cutting;
- door leaf falling in case of spring break.

* Detailed warranty terms are listed in the doors operation manual